


REVISIONS			
REV	DESCRIPTION	DATE	APPD
A	RELEASED - ECO 12123	1-11-05	GKH

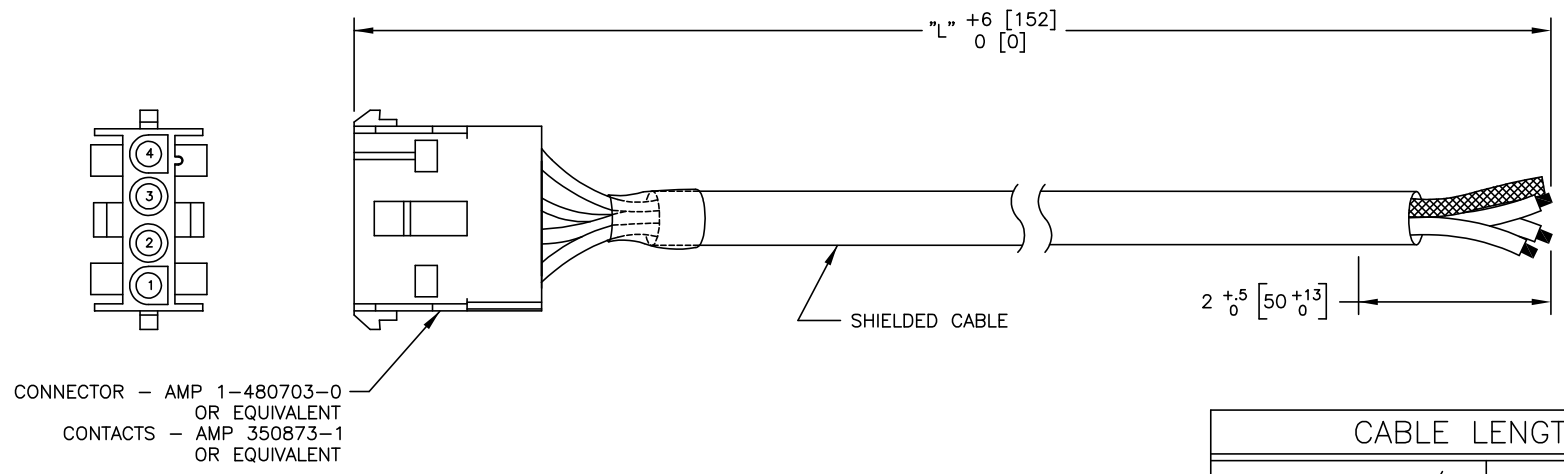

CABLE LENGTH	
CATALOG P/N	" L "
P3-10	120 [3048]
P3-25	300 [7620]

CABLE SPECIFICATIONS

TEMPERATURE RATING: 80 DEGREES C.

VOLTAGE RATING: 600V

INSULATED CONDUCTORS: 14 AWG TINNED COPPER STRANDED, PVC INSULATED.

CONSTRUCTION: 1 TWISTED TRIPLET (3 CONDUCTORS TWISTED TOGETHER). OVERALL ALUMINUM/POLYESTER PLUS MINIMUM 85 % COVERAGE TINNED COPPER BRAIDED SHIELD. JACKET TO BE FLAME RETARDANT PVC, BLACK, WITH MATTE FINISH. APPROX. 10 mm O.D.


CONDUCTOR INSULATION COLORS: BLACK , RED, WHITE

ELECTRICAL PROPERTIES:

CONDUCTOR RESISTANCE: 9 OHMS/ KM MAX. @ 20 DEG. C.
INSULATION RESISTANCE: 100 MEGOHMS / KM MIN. @ 20 DEG. C.

UL STYLE: 2463 OR SIMILAR

WIRING DIAGRAM

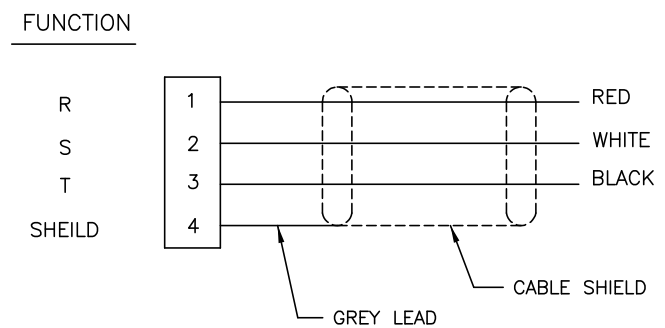

DIMENSIONS: INCHES [MILLIMETERS]

DRAWN 7-13-04 JH CHECKED 10-7-04 <i>gja</i> APPROVED 1-11-05 <i>[Signature]</i>									
TITLE IB 34000 SERIES POWER CABLE									
TOLERANCES ON DECIMALS ANGLES ±1° XX ±.010 XXX ±.005 UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	<table border="1"> <tr> <td>SIZE</td> <td>NUMBER</td> </tr> <tr> <td>A</td> <td>P3-10/P3-25</td> </tr> <tr> <td>SCALE</td> <td>N/A</td> </tr> <tr> <td colspan="2">SHEET 1 of 1</td> </tr> </table>	SIZE	NUMBER	A	P3-10/P3-25	SCALE	N/A	SHEET 1 of 1	
SIZE	NUMBER								
A	P3-10/P3-25								
SCALE	N/A								
SHEET 1 of 1									

THIS DRAWING AND THE INFORMATION DISCLOSED HEREIN ARE PROPRIETARY DATA OF MOTION CONTROL GROUP AND IS TO BE IMMEDIATELY RETURNED UPON REQUEST. REPRODUCTION OF THIS DRAWING OR THE INFORMATION CONTAINED HEREIN IS PROHIBITED WITHOUT THE EXPRESSED WRITTEN APPROVAL OF MCG.