


WHERE XXX IS THE CABLE LENGTH IN FT. STANDARD LENGTH 10, 25 AND 50 FT.


REVISIONS			
REV	DESCRIPTION	DATE	APPD
A		6/2/98	E. A.
B	ADDED MOLD STRAIN RELIEF	7/16/98	E.A.
C	ECO - 12198	3-15-05	GKH

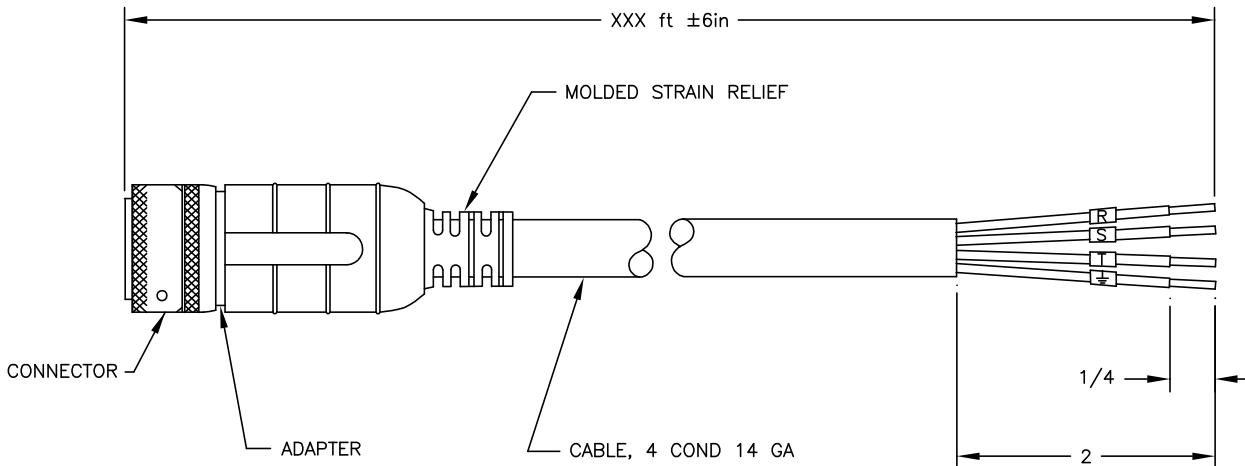

SHIELD	
TYPE	BRAID
AWG	#36 TINNED COPPER
COVERAGE	85% MINIMUM

JACKET	
INSULATION	THERMOPLASTIC
THICKNESS	0.0465
NOMINAL O.D.	0.441 ±0.010
COLOR	BLACK
RATING	90°C, 600V

GENERAL	
	4 CONDUCTOR
	12 AWG (65/30) TINNED COPPER
	INSULATION POLYVINYL CHLORIDE
	COLORS BROWN, BLACK, BLUE, GREEN/YELLOW
	UL TRAY CABLE TYPE TC

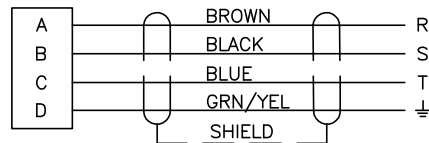

WIRING DIAGRAM

NOTE: THIS DRAWING HAS BEEN CREATED BY AUTOCAD.
MANUAL REVISIONS ARE NOT ALLOWED.

DRAWN	APG
	6/2/98
CHECKED	
APPROVED	ED
	AWAD



TITLE	
MOTOR ASSY, MOTOR POWER	

TOLERANCES ON DECIMALS FRACTIONS ±1/64 XX ±.010 ANGLES ±1/2° XXX ±.005 UNLESS OTHERWISE SPECIFIED DIMENSION ARE IN INCHES	SIZE B	NUMBER SPA48xxx
SCALE N/A	SHEET 1 of 1	

THIS DRAWING AND THE INFORMATION DISCLOSED HEREIN ARE PROPRIETARY DATA OF MOTION CONTROL GROUP AND IS TO BE IMMEDIATELY RETURNED UPON REQUEST. REPRODUCTION OF THIS DRAWING OR THE INFORMATION CONTAINED HEREIN IS PROHIBITED WITHOUT THE EXPRESSED WRITTEN APPROVAL OF MCG.