




DC500-4Q-36/48

*DC - DC Drive for Battery Operated
Electric Vehicles with Separately Excited DC Motors*

QUICK START GUIDE


DIMENSIONS

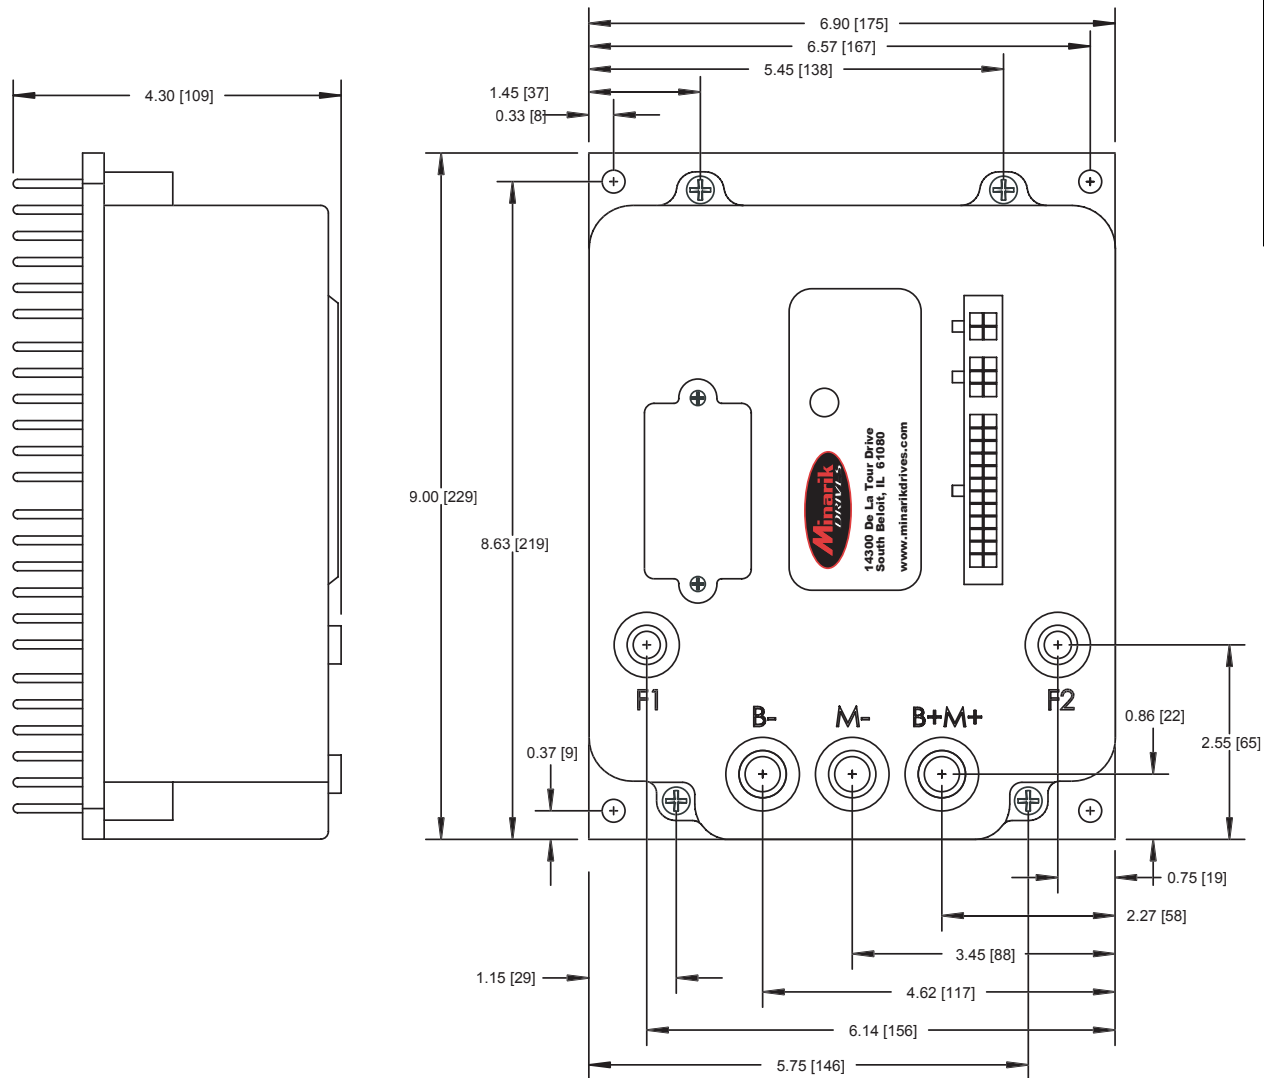

SPECIFICATIONS

	DC500-4Q-36/48
Input Voltage (VDC)	36 - 48
Output Voltage (VDC)	0 to Input Voltage
Maximum Armature 2 minute Current	500 A
Maximum Field 2 minute Current	50 A
Maximum Armature 1 hour Current	200 A
Maximum Field 1 hour Current	15 A

CONNECTIONS

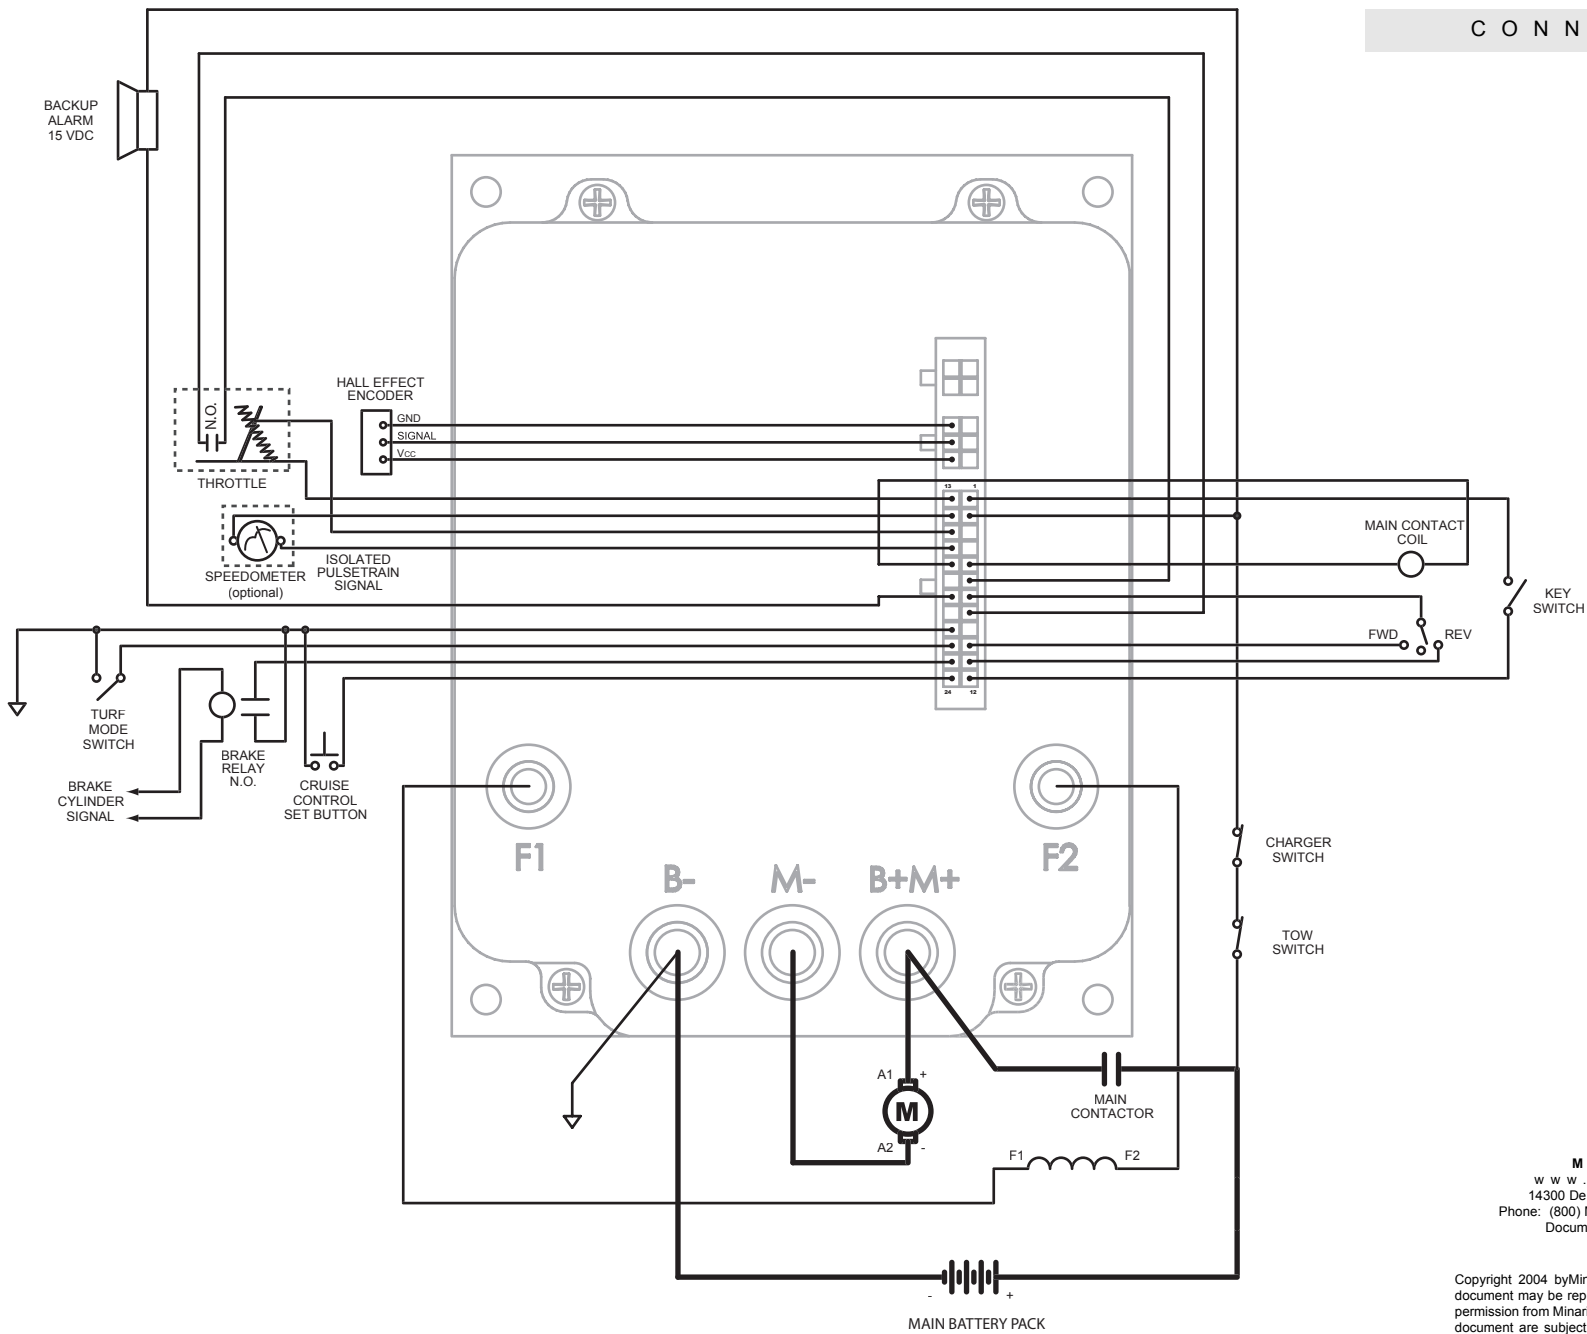

MINARIK DRIVES
 www.minarikdrives.com
 14300 De La Tour Drive, South Beloit, IL 61080;
 Phone: (800) MINARIK (646-2745); Fax: (815) 624-6960
 Document Number: 250-0380, Revision 1;
 Printed in the U.S.A. - 03/04

Copyright 2004 by Minarik Drives - All rights reserved. No part of this document may be reproduced or transmitted in any form without written permission from Minarik Drives. The information and technical data in this document are subject to change without notice. Minarik Drives and its Divisions make no warranty of any kind with respect to this material, including, but not limited to, the implied warranties of its merchantability and fitness for a given purpose. Minarik Drives and its Divisions assume no responsibility for any errors that may appear in this document and make no commitment to update or to keep current the information in this document. kc030304