


| | |
|-------|----------------------|
| Model | GX500J series |
|-------|----------------------|

■ DIMENSIONS

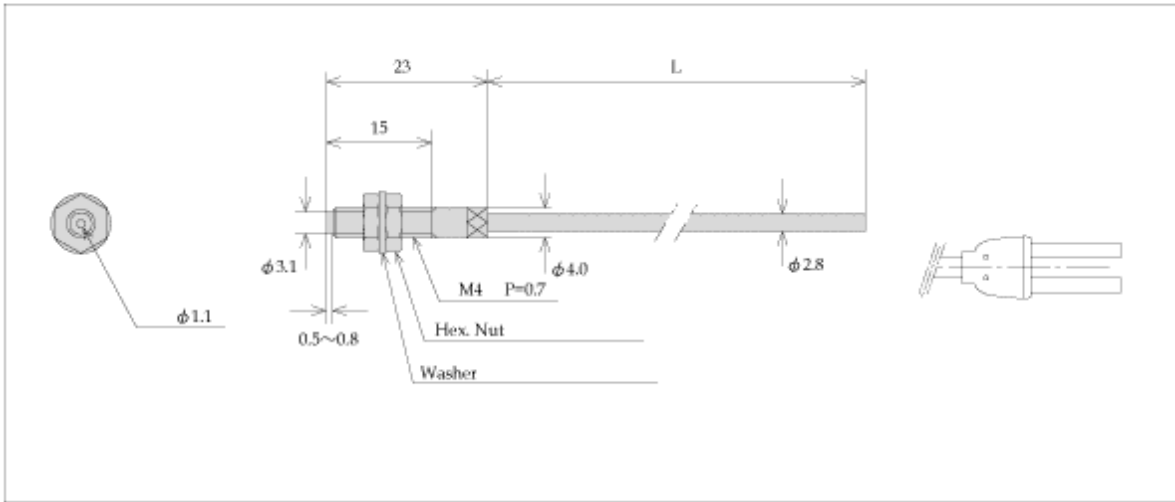

| | | | | |
|-----------------------------------|----------------|--|--------|--------|
| Model | | GX505J | GX510J | GX520J |
| Fiber Length (m) | | 0.5 | 1 | 2 |
| Ambient temperature | | Fiber end : -60~+230°C External cover : 200°C | | |
| Fiber Material | External cover | Silicon tube | | |
| | Inside fiber | Glass | | |
| Fiber Diameter | Cable | 2.8 | | |
| | Inside fiber | Bundle diameter : 1.1 half divided | | |
| Minimum bending radius | | R25 | | |
| Minimum detection object diameter | | ø0.015 | | |